accuc@ld

ARG15PVDR



72" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 15 cu.ft. upright glass door commercial all-refrigerator for the display and refrigeration of vaccines with six ventilated removable drawers, antimicrobial silver-ion handle, and hospital grade cord with 'green dot' plug

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread

Product Features:

Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC guidelines	
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period	
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs	
Commercial design	Meets UL-471 commercial standards	
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C	
Full-extension ventilated drawers	Six drawers made from powder-coated aluminum glide out smoothly for convenient storage, with perforated bottoms to ensure proper air circulation	
Removable drawers	Drawers can be easily removed for convenient transporting of contents to a lab counter or work station	
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range	
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)	




accuc@ld

ARG15PVDR Specifications:

Overview			
Height of Cabinet	72.0" (183 cm)		
Width	23.38" (59 cm)		
Width with Door Open	23.88" (61 cm)		
Depth	24.38" (62 cm)		
Depth with Handle	26.13" (66 cm)		
Depth with door at 90°	46.5" (118 cm)		
Capacity	15.0 cu.ft. (425 L)		
Defrost Type	Automatic		
Door	Glass		
Cabinet	White		
US Electrical Safety	ETL		
Canadian Electrical Safety	ETL-C		
Amps	1.4		
Voltage/Frequency	115 V AC/60 Hz		
Weight	235.0 lbs. (107 kg)		
Shipping Weight	270.0 lbs. (122 kg)		
Parts & Labor Warranty	2 Years		
Compressor Warranty	5 Years		
UPC	761101075259		
Refrigerator Features			
Door Swing	RHD		
Reversible	Yes		
Shelf Type	Drawers		
Shelf Qty	6		
Adjustable Shelves	Yes		
Thermostat Type	Digital		
Fan Type	Interior		
Refrigerant Type	R600a		
Refrigerant Amount	2.65oz.		
Interior Light	Yes		
	2 to 8°C		
Temperature Range			
Temperature Range Sound Level	41.8 dB		
Sound Level			
Sound Level Dimensions	41.8 dB		

Compressor Step Height	6.5" (17 cm)
Compressor Step Width	20.0" (51 cm)
Compressor Step Depth	5.0" (13 cm)

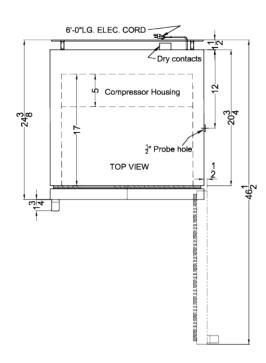

accuc@ld

