accucold

ARG2PVLHD



22.25" x 18.5" x 23.25" (H x W x D)

Performance series Pharma-Vac 2 cu.ft. countertop glass door all-refrigerator for vaccine storage with antimicrobial silver-ion handle and hospital grade cord with 'green dot' plug

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread

Product Features:

Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC guidelines	
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period	
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C	
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range	
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)	
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup	
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment	
Open door alarm	Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)	
Audible power failure alarm	Battery-powered alarm sounds if the power connection is interrupted	

ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@accucold.com




accucold

ARG2PVLHD Specifications:

Overview		
Height of Cabinet	22.25" (57 cm)	
Width	18.5" (47 cm)	
Width with Door Open	18.88" (48 cm)	
Depth	23.25" (59 cm)	
Depth with Handle	24.75" (63 cm)	
Depth with door at 90°	42.5" (108 cm)	
Capacity	1.94 cu.ft. (55 L)	
Defrost Type	Automatic	
Door	Glass	
Cabinet	White	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Amps	0.6	
Voltage/Frequency	115 V AC/60 Hz	
Weight	80.0 lbs. (36 kg)	
Shipping Weight	86.0 lbs. (39 kg)	
Parts & Labor Warranty	2 Years	
Compressor Warranty	5 Years	
UPC	761101107004	
Refrigerator Features		
Door Swing	LHD	
Reversible	No	
Shelf Type	Wire	
Shelf Qty	2	
Adjustable Shelves	Yes	
Thermostat Type	Digital	
Fan Type	Interior	
Refrigerant Type	R600a	
Refrigerant Amount	0.84oz.	
High Side PSI	280.0	
Low Side PSI	90.0	
Interior Light	Yes	
Temperature Range	2 to 8°C	
Dimensions		
Interior Height	16.5" (42 cm)	
0		
Interior Width	15.25" (39 cm)	
	15.25" (39 cm) 15.75" (40 cm)	
Interior Width		

Compressor Step Width	15.25" (39 cm)
Compressor Step Depth	4.25" (11 cm)

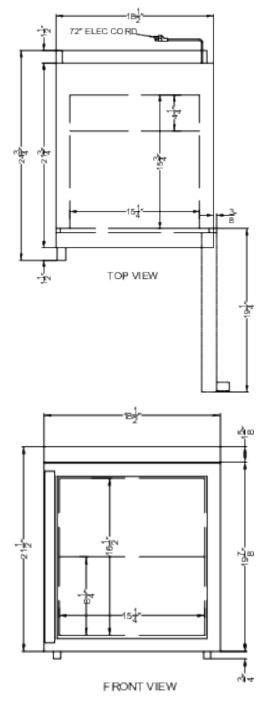

ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

