
accuc@ld

ARS8PVDR

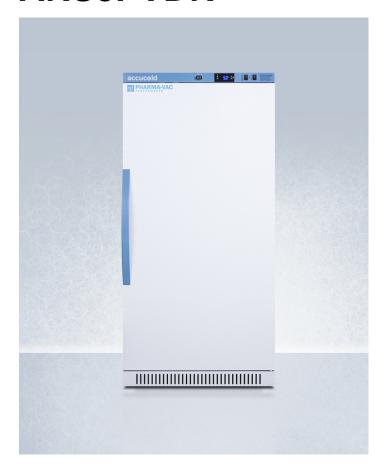

50" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 8 cu.ft. upright allrefrigerator for vaccine storage with four ventilated removable drawers

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Four removable drawers allow easy access, movement, and storage of interior contents


Product Features:

Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC guidelines	
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period	
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C	
Full-extension ventilated drawers	Four drawers made from powder-coated aluminum glide out smoothly for convenient storage, with perforated bottoms to ensure proper air circulation	
Removable drawers	Drawers can be easily removed for convenient transporting of contents to a lab counter or work station	
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range	
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)	
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup	
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to	
ACCUCOLD DIVISION, FELIX STORCH, INC. 770 Garrison Avenue Bronx, NY 10474 USA TEL 718		

accuc@ld

ARS8PVDR Specifications:

Overview		
Height of Cabinet	50.0" (127 cm)	
Width	23.38" (59 cm)	
Width with Door Open	23.88" (61 cm)	
Depth	24.38" (62 cm)	
Depth with Handle	26.13" (66 cm)	
Depth with door at 90°	46.5" (118 cm)	
Capacity	8.0 cu.ft. (227 L)	
Defrost Type	Automatic	
Door	White	
Cabinet	White	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Amps	1.4	
Voltage/Frequency	115 V AC/60 Hz	
Weight	161.0 lbs. (73 kg)	
Shipping Weight	176.0 lbs. (80 kg)	
Parts & Labor Warranty	2 Years	
Compressor Warranty	5 Years	
Refrigerator Features		
Door Swing	RHD	
Reversible	Yes	
Shelf Type	Drawers	
Shelf Qty	4	
Adjustable Shelves	Yes	
Thermostat Type	Digital	
Fan Type	Interior	
Refrigerant Type	R600a	
Refrigerant Amount	1.73oz.	
Interior Light	Yes	
Temperature Range	2 to 8°C	
Dimensions		
Interior Height	41.25" (105 cm)	
Interior Width	20.0" (51 cm)	
Interior Depth	17.0" (43 cm)	
Compressor Step Height	6.5" (17 cm)	
Compressor Step Width	20.0" (51 cm)	
Compressor Step Depth	5.0" (13 cm)	

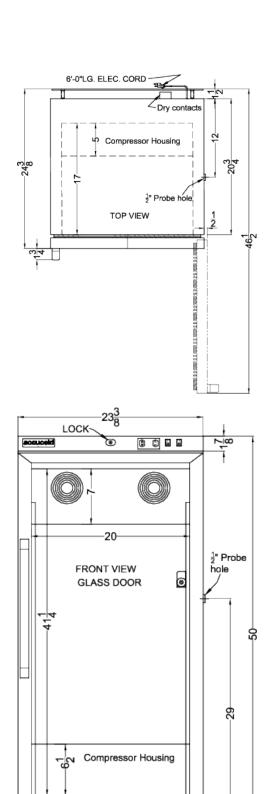



ELEC. CORD-